




- PRODUCT NAME:** Bag Filter
- RAW MATERIAL:**
Media Material - Polypropylene
Ring Material - Stainless Steel
- MICRON RATING:** 1, 5, 10, 20, 50
- DIMENSION:**
 7 in diameter x 17 in length (Size #1)
 7 in diameter x 32 in length (Size #2)
 4 in diameter x 9 in length (Size #3)
 4 in diameter x 15 in length (Size #4)
- CONNECTION TYPE:** Sewn
- FEATURES & BENEFITS:**
- Higher flow rates than cartridge filters
 - Easier to maintain
 - Economical
 - Particularly suited for filtering higher viscosity liquids
- APPLICATIONS:** Strong Acid, Weak Acid, Strong Alkali, Weak Alkali, Clean, Aromatic, Organic Solvent, Water

Technical Data	
Max Pressure	10 bar (150 psi)
Filtering Grade	72 micron
End Connection	Threaded
Operation	Manual
Control	Manual
Max Recommended Working Pressure	8 bar (120 psi)
Filter Screen Area	Double Filter Screen
Effective Filtering Area	47%

The Part Number:

2-1BGPP11SSX01L

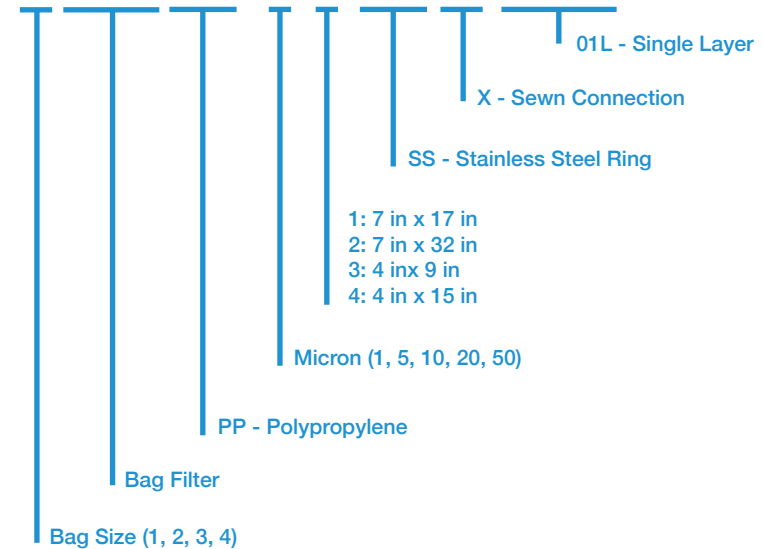

Flow Rate Size #1					
Micron Rating (um)	1	5	10	20	50
Average Flow Rate (L/min) Pressure Drop <0.10 Mpa Per 10"L	185	205	225	235	240

Flow Rate Size #2					
Micron Rating (um)	1	5	10	20	50
Average Flow Rate (L/min) Pressure Drop <0.10 Mpa Per 10"L	380	405	430	450	460

Flow Rate Size #3					
Micron Rating (um)	1	5	10	20	50
Average Flow Rate (L/min) Pressure Drop <0.10 Mpa Per 10"L	80	85	90	95	100

Flow Rate Size #4					
Micron Rating (um)	1	5	10	20	50
Average Flow Rate (L/min) Pressure Drop <0.10 Mpa Per 10"L	135	145	155	160	165