




- PRODUCT NAME:** Metal T Screen Filter
- RAW MATERIAL:** **Screen -** Stainless Steel
Protective Coating - 120 micron extra-durable polyester, applied electrostatically and oven-cured on a zinc phosphate layer for maximal anti-corrosion protection
- SIZES:** 1/4 in, 3/8 in, 1/2 in, 3/4 in, 1 in, 1.25 in, and 1.5 in
- CLEANING:** The wire mesh elements can be easily cleaned or replaced without removing the entire strainer from the line
- FEATURES & BENEFITS:**
- Filters can be inserted in line with the rest of the system
 - Quick and easy cleaning
 - Adapted to filter impurities at greater flow rates
- APPLICATIONS:**
- Agriculture
 - Drinking water pre-filter
 - Car washes
 - Medical devices
 - Pressure washers
 - **NOT for residential use**

The Part Number:

7-TSF1280B

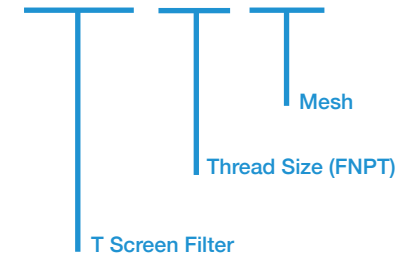

1/8 IN MNPT THRU 1.5 IN NPT INLINE STRAINERS

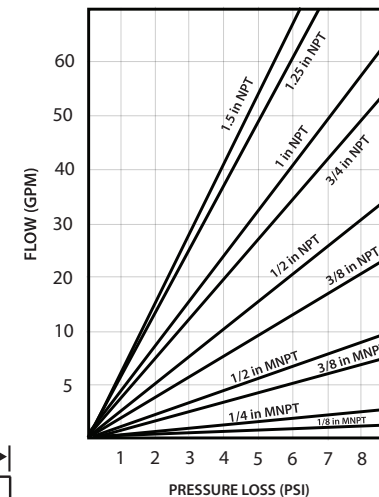

Technical Data	
Max Pressure	150 PSI at 70°F
Filtering Grade	72 micron
End Connection	Threaded
Operation	Manual
Control	Manual
O-Ring	Buna
Max Recommended Working Pressure	8 bar (120 psi)
Filter Screen Area	Double Filter Screen
Effective Filtering Area	47%

	A	B	C	D	Filter Area
Female NPT: 3/8 in, 1/2 in, 3/4 in	3.58	5.38	2.90	4.70	17.33 sq. in
Female NPT: 1 in	4.95	6.40	4.00	5.55	29.73 sq. in